


Plaster and Render Beads

Beads that are designed to give true corners and edges to plaster and render where thick or 'rough' coats are required. Fixing is easy using plaster dabs or galvanised nails (with galvanised beads) and the mesh wings provide resistance to cracking while offering a good key to the plaster or render.

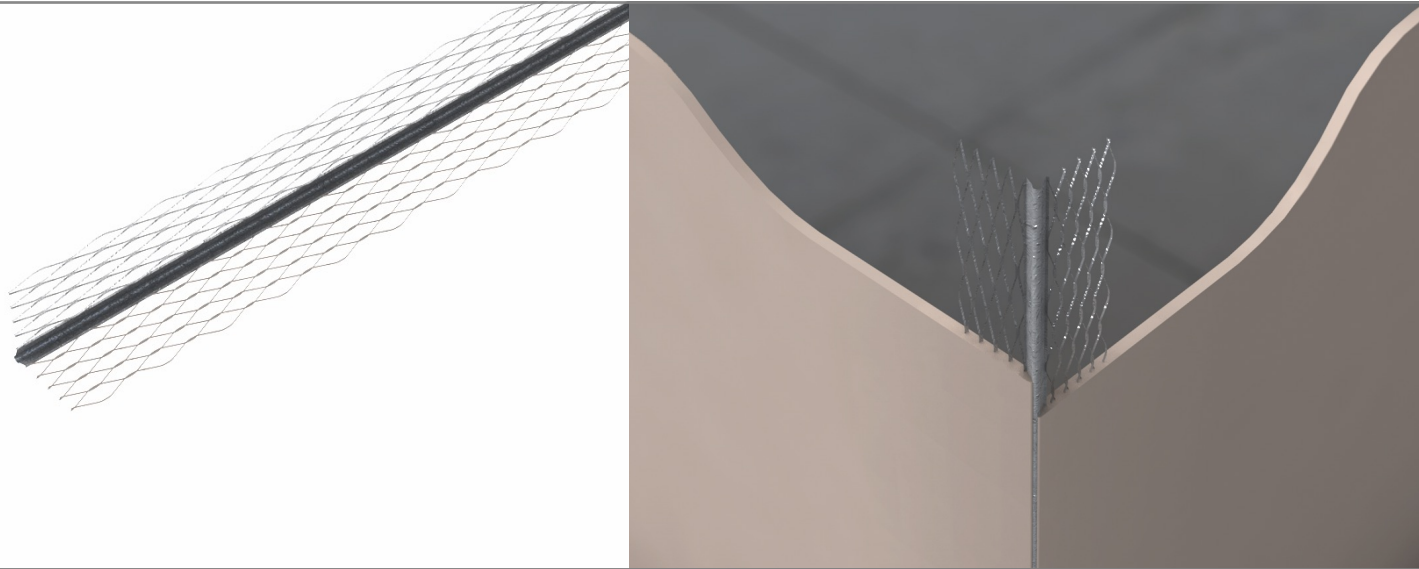

GAB Standard Galvanised Angle Bead, Mesh Wing

A traditional wet plaster bead which provides a strong true corner or arris to protect the plaster edge, with the mesh wings allowing for a good plaster key and resistance to cracking. Fixed by plaster dabs, grab adhesive or galvanised nails/screws with washer at maximum 600mm centres. Push the wing in further to the background to achieve the desired plaster depth 10-13mm then ensure the nose is set square and plumb as required. Internal use only. Beads can be cut to size as required using tin-snips and/or a hacksaw. The large diamond of the expanded metal wings provide a suitable key to prevent cracking. Avoid damage to bead and coating when trowelling.

Standard:	BS EN13658-1:2005
Material:	Galvanised mild steel DX51D+Z275 (275g/m ² zinc coating)
Material gauge:	0.4mm
Reaction to fire:	Class A1

Code	Size	Per Box	Weight
GAB24	2.4m x 43mm wing	50 lengths	13kgs
GAB27	2.7m x 43mm wing	50 lengths	14.5kgs
GAB30	3.0m x 43mm wing	50 lengths	16kgs
GPAB24	2.4m x 48mm wing	50 lengths	14kgs
GPAB27	2.7m x 48mm wing	50 lengths	17kgs

Goods to be stored and transported laying down and in dry conditions.
Please dispose or recycle in accordance with waste management regulations.

COSHH & Health & Safety.

Contains no substances hazardous to health. The comparative rough surface finish and sharp edges of expanded metal requires care when handling manually, to avoid risk of cuts and abrasions gloves should be worn.