


# MINI Mini Hanger

Data sheet

Issue Date:  
March 2026

The Mini hanger is, ideal for trimming around ceiling hatches and other similar light duty applications. Manufactured from 0.8mm thick galvanised steel. Suitable for timber depth up to 100mm. Produced from galvanised steel to BS EN 10346 DX51D + G275 as standard, or stainless steel available to order. Galvanised hangers must be fixed using 30mm x 3.75mm sherardised square twisted nails in all pre-punched holes.

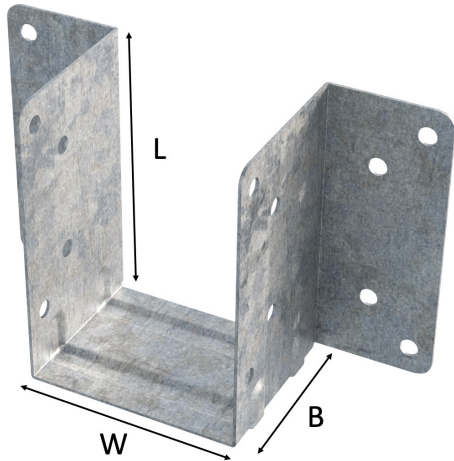

## Product

Features:

- Thin profile

Fixings:

- Type A, 30 x 3.75mm Sherardised Square Twist Nails
- Type B, 35 x 3.75mm.


Approvals:

- CE Marked
- UKCA Marked

Packaging:

- Box Quantities of 250

## Load Directions



Product Details

Product code	Dimensions (mm)			Holes no. 4.0 Ø (mm)		Characteristic Capacity (kN)											
						C16 Timber				C24 Timber				TR26 Timber			
	W	L	B	Legs	Side Flange	Type A nails		Type B nails		Type A nails		Type B nails		Type A nails		Type B nails	
						F <sub>up</sub>	F <sub>down</sub>	F <sub>up</sub>	F <sub>down</sub>	F <sub>up</sub>	F <sub>down</sub>	F <sub>up</sub>	F <sub>down</sub>	F <sub>up</sub>	F <sub>down</sub>	F <sub>up</sub>	F <sub>down</sub>
MINI/38	38	71	40	8	8	2.48	5.59	2.60	6.55	2.80	6.32	2.94	7.40	2.96	6.68	3.11	7.82
MINI/44	44	68				2.80		3.02		3.16		3.41		3.34		3.60	
MINI/47	47	67				2.80		3.22		3.16		3.64		3.34		3.85	
MINI/50	50	65				2.80		3.28		3.16		3.70		3.34		3.91	

